



COVER = MIN WT 147 LBS  
FRAME = MIN WT 220 LBS


ASTM A48-CL35  
AASHTO M306

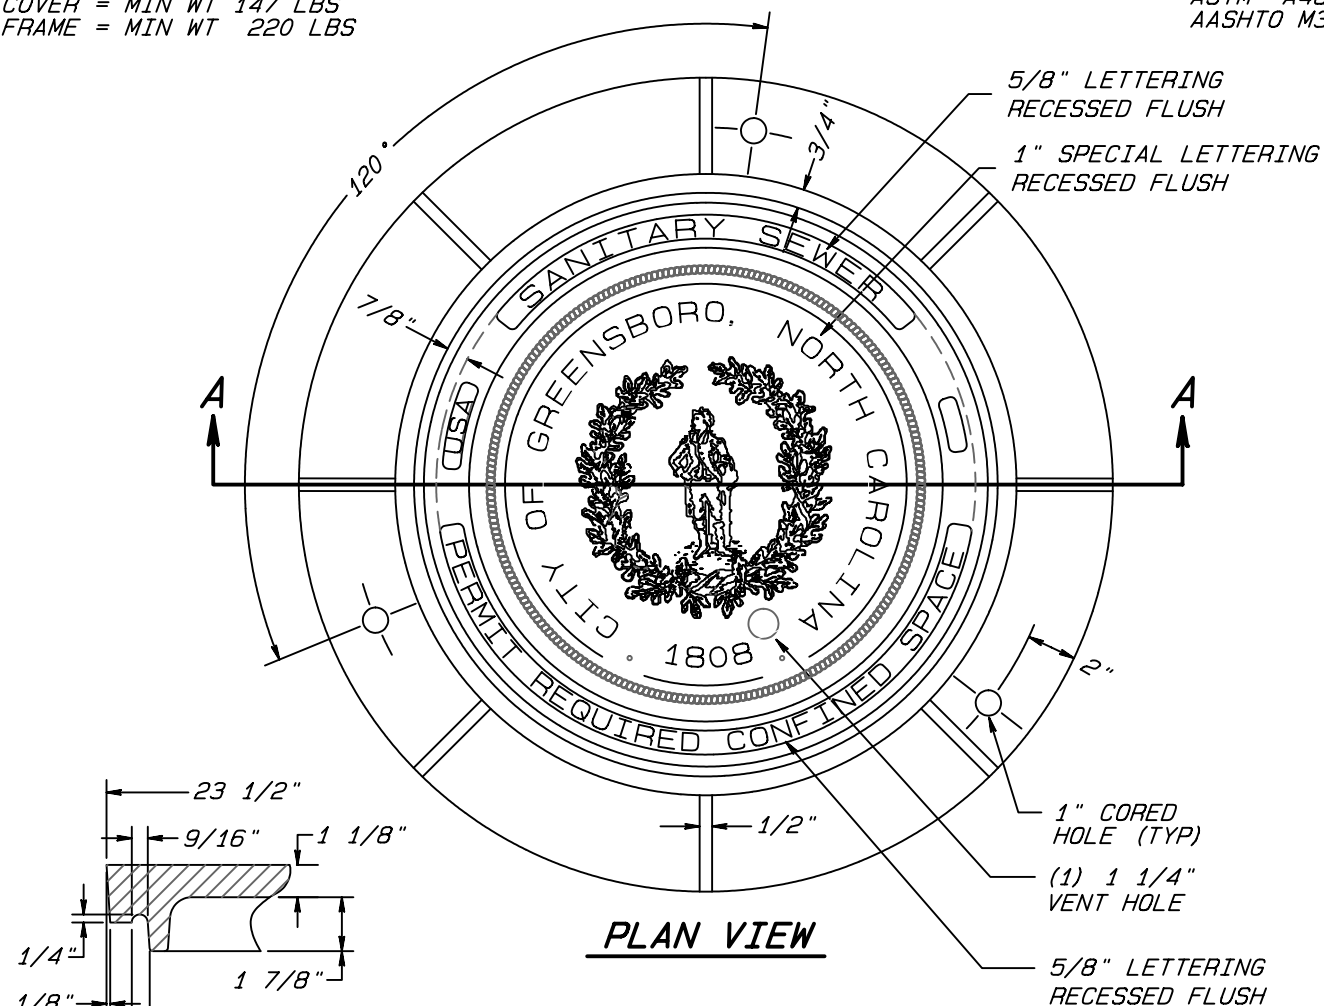

*PLAN VIEW*

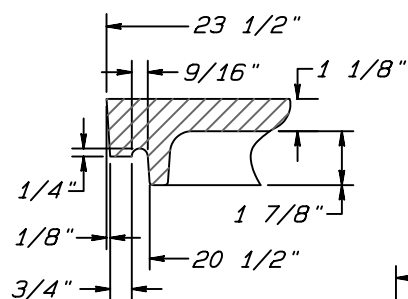

## DETAIL

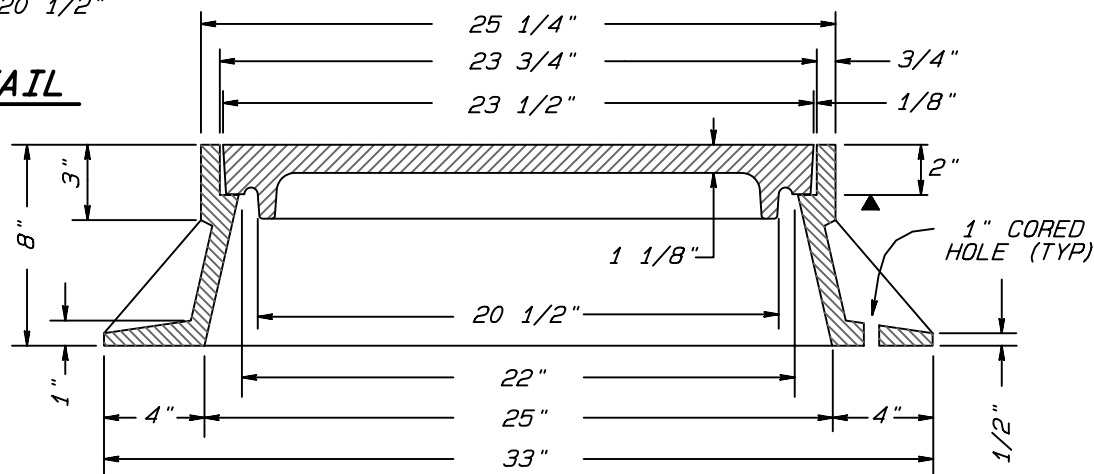

**SECTION A-A**

NOTES:

ALL DIMENSIONS AND TOLERANCES ARE TO BE CONCENTRIC AND WILL SUPERSEDE ANY ASTM STANDARDS WITH A MAXIMUM VARIATION  $\pm 1/16"$  ON ALL DIMENSIONS.

MANHOLE RING TO BE ANCHORED WITH 1/2" REDHEAD STAINLESS STEEL ANCHORS  
AND SEALED BETWEEN RING AND CONE WITH BITUMASTIC SEALER.

▼ MACHINED BEARING SURFACE

***C I T Y   O F   G R E E N S B O R O***

### STANDARD MANHOLE RING AND COVER FOR NON-PAVED AREAS

**STD. NO.**

**REV.**

205

MAY-88	MAR-01
JAN-97	AUG-02
MAR-98	DEC-05